


HOW TO ORDER

"Hi-Lo PRESSURE, TWO PUMPS" AC MOTOR HYDRAULIC POWER PACKS (W800553 STEEL MANIFOLD / ϕ 140 & ϕ 180 TANKS)

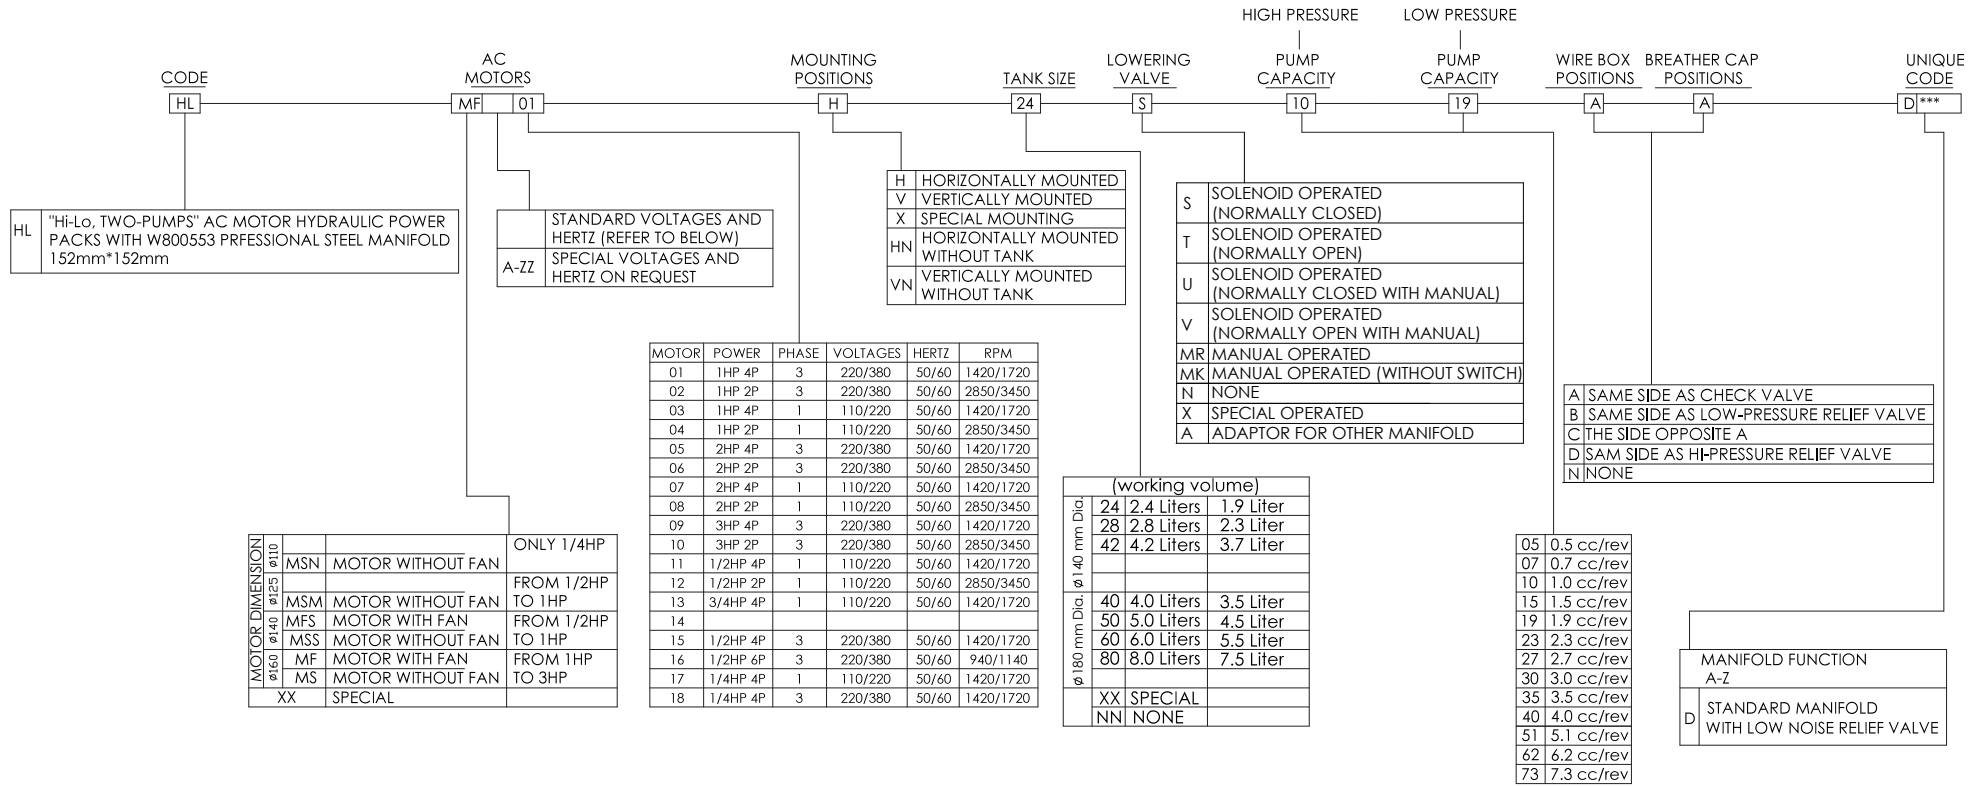

MOTOR	POWER	PHASE	VOLTAGES	HERTZ	RPM
01	1HP 4P	3	220/380	50/60	1420/1720
02	1HP 2P	3	220/380	50/60	2850/3450
03	1HP 4P	1	110/220	50/60	1420/1720
04	1HP 2P	1	110/220	50/60	2850/3450
05	2HP 4P	3	220/380	50/60	1420/1720
06	2HP 2P	3	220/380	50/60	2850/3450
07	2HP 4P	1	110/220	50/60	1420/1720
08	2HP 2P	1	110/220	50/60	2850/3450
09	3HP 4P	3	220/380	50/60	1420/1720
10	3HP 2P	3	220/380	50/60	2850/3450
11	1/2HP 4P	1	110/220	50/60	1420/1720
12	1/2HP 2P	1	110/220	50/60	2850/3450
13	3/4HP 4P	1	110/220	50/60	1420/1720
14					
15	1/2HP 4P	3	220/380	50/60	1420/1720
16	1/2HP 6P	3	220/380	50/60	940/1140
17	1/4HP 4P	1	110/220	50/60	1420/1720
18	1/4HP 4P	3	220/380	50/60	1420/1720

(working volume)		
ϕ 140 mm Dia.	24	2.4 Liters / 1.9 Liter
	28	2.8 Liters / 2.3 Liter
	42	4.2 Liters / 3.7 Liter
ϕ 180 mm Dia.	40	4.0 Liters / 3.5 Liter
	50	5.0 Liters / 4.5 Liter
	60	6.0 Liters / 5.5 Liter
	80	8.0 Liters / 7.5 Liter
	XX	SPECIAL
	NN	NONE

MOTOR DIMENSION		
ϕ 110	MSN	MOTOR WITHOUT FAN ONLY 1/4HP
ϕ 125		
ϕ 140	MMS	MOTOR WITHOUT FAN FROM 1/2HP TO 1HP
ϕ 148	MFS	MOTOR WITH FAN FROM 1/2HP TO 1HP
ϕ 150	MSS	MOTOR WITHOUT FAN FROM 1HP TO 3HP
	MF	MOTOR WITH FAN FROM 1HP TO 3HP
	MS	MOTOR WITHOUT FAN
	XX	SPECIAL

05	0.5 cc/rev
07	0.7 cc/rev
10	1.0 cc/rev
15	1.5 cc/rev
19	1.9 cc/rev
23	2.3 cc/rev
27	2.7 cc/rev
30	3.0 cc/rev
35	3.5 cc/rev
40	4.0 cc/rev
51	5.1 cc/rev
62	6.2 cc/rev
73	7.3 cc/rev

MANIFOLD FUNCTION	
A-Z	
D	STANDARD MANIFOLD WITH LOW NOISE RELIEF VALVE

Special orders are available on request. Please consult our sales department.