


Ordering Code: **MH05CDS-X-Y-Z 01**


Stack Height : 49.5mm

Technical drawing showing front and side views of the manifold. Dimensions: 72.2, 76.2, 72.2, 220.5, 63.0, 49.5. Port labels: P, T, A, B, P1, T1, A1, B1. O-RING CODE NO. 4KAA014AA001.

UNIT:mm

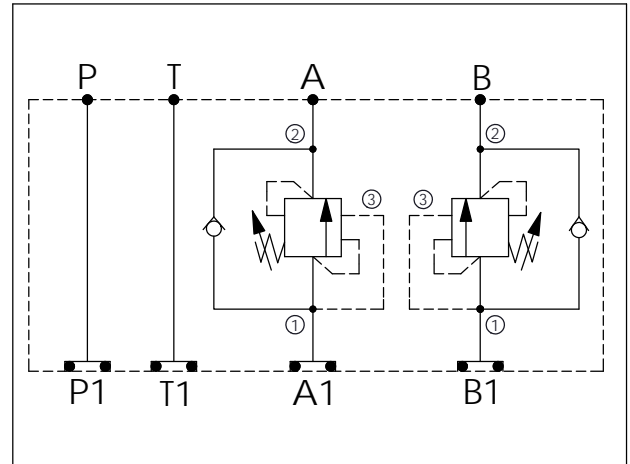

TECHNICAL DATA	
Aluminum Body Pressure Rating:	250 bar
Ductile Iron Body Pressure Rating:	350 bar
Rated flow:	80 l/min
Cartridge Valve:	Refer to CB2A-X-Y-Z
	* Refer to Winner Cartridge Valve Catalog.
Aluminum	0.9 kg(WITHOUT VALVES) 1.7 kg(INCLUDE VALVES)
Ductile Iron	2.5 kg(WITHOUT VALVES) 3.2 kg(INCLUDE VALVES)
* If you need the special specification. Please contact us.	

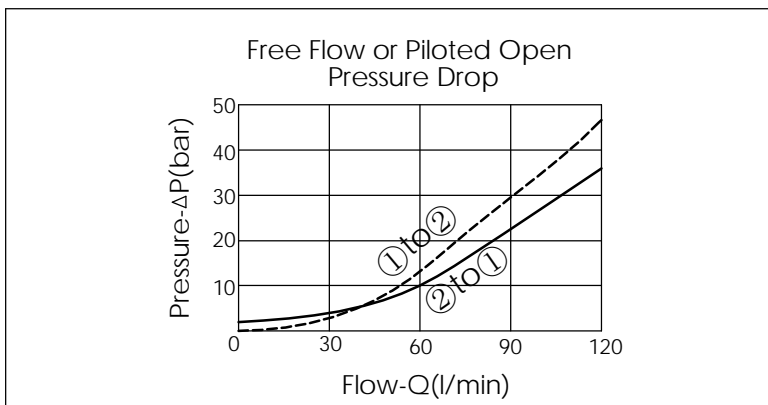

X	SELECTION FOR A PORT CONTROL
2A3	CAVITY ONLY(WITHOUT VALVE)
CB3H	CB2A33HL (3:1 , 280bar)
CB4J	CB2A34JL (4.5:1 , 350bar)
CB0J	CB2A30JL (10:1 , 350bar)

Y	SELECTION FOR B PORT CONTROL
2A3	CAVITY ONLY(WITHOUT VALVE)
CB3H	CB2A33HL (3:1 , 280bar)
CB4J	CB2A34JL (4.5:1 , 350bar)
CB0J	CB2A30JL (10:1 , 350bar)

Z	BODY MATERIAL
A	HIGH-STRENGTH ALUMINUM
S	DUCTILE IRON