



ISO 03 COVER MANIFOLD

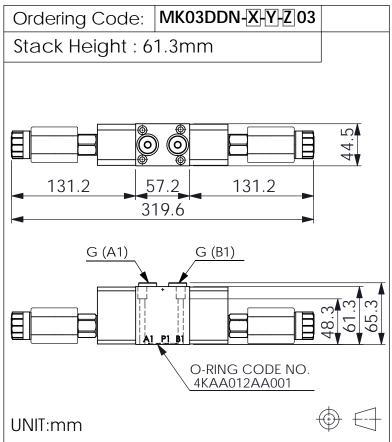



TECHNICAL DATA

Aluminum Body Pressure Rating: 250 bar

Ductile Iron

Body Pressure Rating:

34 I/min

350 bar

Rated flow:

Cartridge Valve: Refer to PFA11A-X-Y-Z

* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.85 1.6	kg(WITHOUT VALVES) kg(INCLUDE VALVES ,WITHOUT COIL)


* If you need the special specification. Please contact us.

X	SELECTION FOR A PORT CONTROL (REFER TO PFA11A-区平区)			
11A3	CAVITY ONLY (WITHOUT VALVE)			
PFA34	PFA11A3D0340N(0.4~34LPM)			
	•	•		

COIL MUST BE ORDERED SEPARATELY (REFER TO EC-19A-☒-肸ℤ)

Z	BODY MATERIAL		
Α	HIGH-STRENGTH ALUMINUM		
	I .		

TYPICAL CIRCUIT:

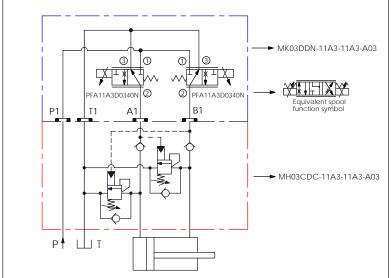

Υ	SELECTION FOR B PORT CONT (REFER TO PFA11A-X-Y-Z)	ROL	
11A3	CAVITY ONLY(WITHOUT VALVE)		
PFA34	PFA11A3D0340N(0.4~34LPM)		
COIL MUST BE ORDERED SEPARATELY (REFER TO EC-19A-X-Y-Z)			

Rev.130422 M.DDN.371