

TECHNICAL DATA

Aluminum Body Pressure Rating: 250 bar
 Ductile Iron Body Pressure Rating: 350 bar


Rated flow: 40 l/min

Cartridge Valve:
 Refer to EP08W-X-Y-Z
 CP08W-Y-Z

* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.35 kg(WITHOUT VALVES)
	0.54 kg(INCLUDE VALVES, WITHOUT COIL)
Ductile Iron	0.95 kg(WITHOUT VALVES)
	1.14 kg(INCLUDE VALVES, WITHOUT COIL)

* If you need the special specification. Please contact us.

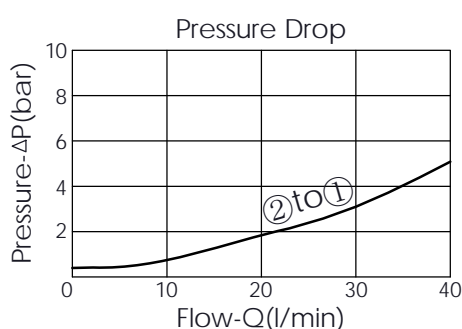

Y	SELECTION FOR B PORT CONTROL	
08W2	CAVITY ONLY(WITHOUT VALVE)	
CP12	CP08W2H12(3/4"-16UNF-2B, PORTS 1 AND 2 OPEN)	

X	SELECTION FOR A PORT CONTROL (REFER TO EP08W-X-Y-Z)	
08W2	CAVITY ONLY(WITHOUT VALVE)	
EP01	EP08W2A01N05, 40LPM, 350bar (NORMALLY CLOSED, WITHOUT COIL)	
EP02	EP08W2A02N05, 40LPM, 350bar (NORMALLY OPEN, WITHOUT COIL)	
EP01M	EP08W2A01M05, 40LPM, 350bar (NORMALLY CLOSED WITH KNOB STYLE MANUAL OVERRIDE, WITHOUT COIL)	
EP02P	EP08W2A02P05, 40LPM, 350bar (NORMALLY OPEN WITH PUSH STYLE MANUAL OVERRIDE, WITHOUT COIL)	
COIL MUST BE ORDERED SEPARATELY (REFER TO EC-04W-X-Y-Z)		

Z	BODY MATERIAL	
A	HIGH-STRENGTH ALUMINUM	
S	DUCTILE IRON	