


Ordering Code:	<b>MH05EPP-X-Y-Z03</b>
Stack Height :	63.0mm


  

O-RING CODE NO.  
4KAA014AA001

UNIT:mm

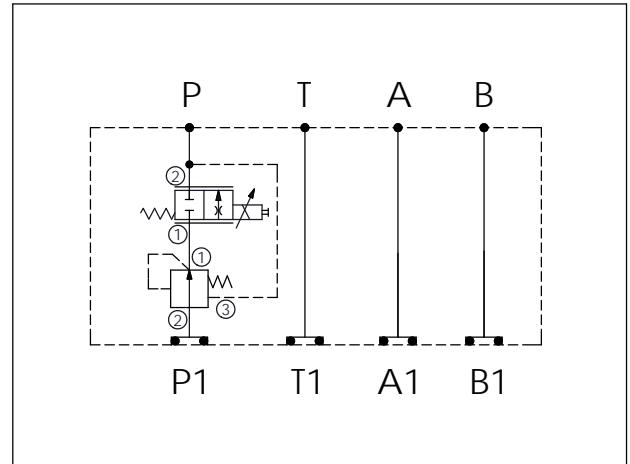

TECHNICAL DATA	
Aluminum Body Pressure Rating:	250 bar
Ductile Iron Body Pressure Rating:	350 bar
Rated flow:	70 l/min
Cartridge Valve:	Refer to LP2A-X-Y-Z PFC17E-X-Y-Z
* Refer to Winner Cartridge Valves Catalog.	
Aluminum	0.95 kg(WITHOUT VALVES) 1.6 kg(INCLUDE VALVES ,WITHOUT COIL)
* If you need the special specification. Please contact us.	

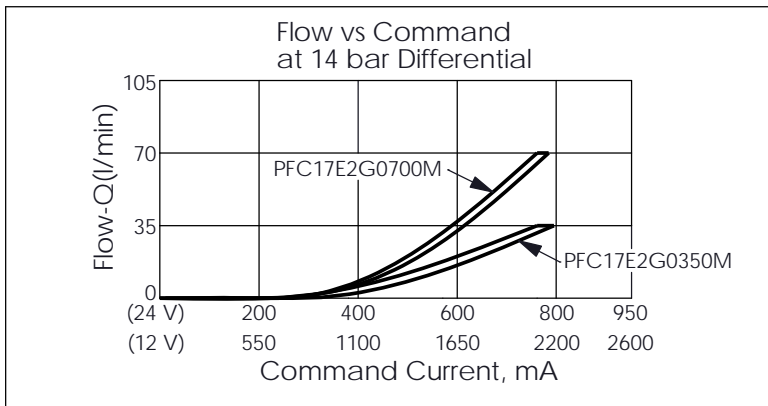

Y	SELECTION FOR FLOW CONTROL VALVE (REFER TO PFC17E-X-Y-Z)	
<b>17E2</b>	CAVITY ONLY(WITHOUT VALVE)	
<b>PFC35</b>	PFC17E2G0350M(35LPM)	
<b>PFC70</b>	PFC17E2G0700M(70LPM)	
COIL MUST BE ORDERED SEPARATELY (REFER TO EC-23C-X-Y-Z)		

X	SELECTION FOR COMPENSATOR	
<b>2A3</b>	CAVITY ONLY(WITHOUT VALVE)	
<b>LP140</b>	LP2A30140N(120LPM,14.0bar)	

Z	BODY MATERIAL	
<b>A</b>	HIGH-STRENGTH ALUMINUM	