



ISO 03 SANDWICH MANIFOLD










UNIT:mm



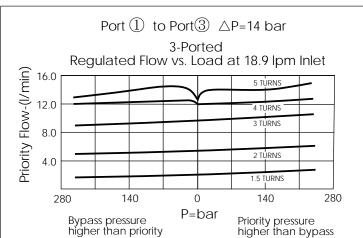

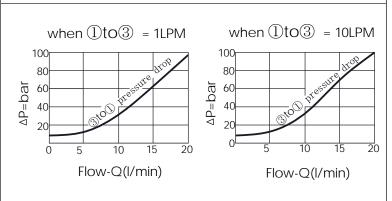



TECHNICAL DATA

Aluminum Body Pressure Rating: 250 bar

Ductile Iron

Body Pressure Rating: 350 bar

Rated flow: 40 I/min

Cartridge Valve:

Refer to FR10W-X-Y-Z

* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.38 kg(WITHOUT VALVE) 0.52 kg(INCLUDE VALVE)	

^{*} If you need the special specification. Please contact us.

X	SELECTION FOR A PORT	CONTROL
N	WITHOUT PORT	

Υ	SELECTION FOR B PORT	CONTROL
10W3	CAVITY ONLY(WITHOUT VALVE)	
FR1L	FR10W31NL (13LPM,240bar)	
FR3L	FR10W33NL (38LPM,240bar)	

Z	BODY MATERIAL	
Α	HIGH-STRENGTH ALUMINUM	

Rev.171006 M.FBB.301