



ISO 03 SANDWICH MANIFOLD




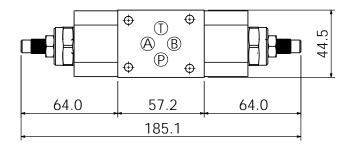


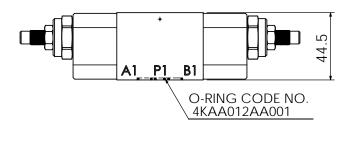

UNIT:mm



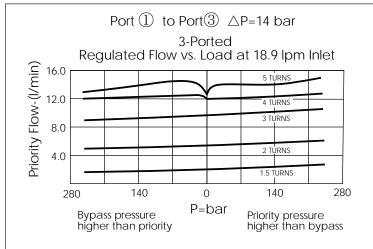

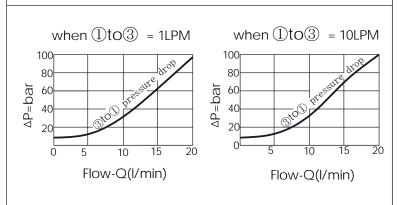

Р	Ţ	A	В
		2 3	
P1	T1	A1	B1

TECHNICAL DATA

Aluminum Body Pressure Rating: 250 bar

Ductile Iron

Body Pressure Rating: 350 bar

Rated flow: 40 1/min

Cartridge Valve:

Refer to FR10W-X-Y-Z

* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.47 kg(WITHOUT VALVES) 0.75 kg(INCLUDE VALVES)

^{*} If you need the special specification. Please contact us.

X	SELECTION FOR A PORT	CONTROL
10W3	CAVITY ONLY(WITHOUT VALVE)	
FR1L	FR10W31NL(13LPM,240bar)	
FR3L	FR10W33NL(38LPM,240bar)	

Υ	SELECTION FOR B PORT	CONTROL
10W3	CAVITY ONLY(WITHOUT VALVE)	
FR1L	FR10W31NL(13LPM,240bar)	
FR3L	FR10W33NL(38LPM,240bar)	

Z	BODY MATERIAL	
Α	HIGH-STRENGTH ALUMINUM	

Rev.171006 M.FDB.301