



STANDARD ASSEMBLIES MANIFOLD DIRECT MOTOR MOUNTED

(Danfoss OMP/OMR Series)

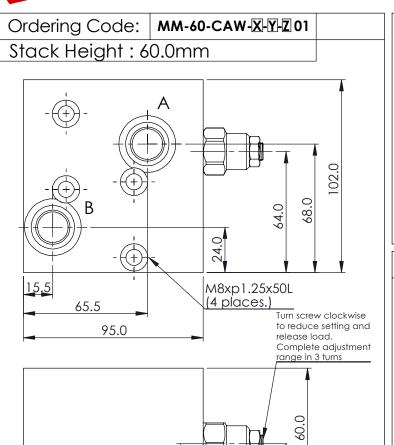

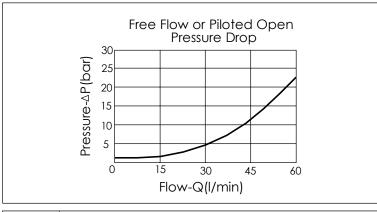


B1

126.8

A1

UNIT:mm

	PORT SIZE	
Y	PORTS	
	A.B	
G04	G 1/2"	



TECHNICAL DATA

Aluminum Body Pressure Rating: 250 bar

Rated flow: 60 1/min

Cartridge Valve:

O-RING CODE NO.

4KAA119BA001

Refer to CB11A-X-Y-Z

* Reference our Cartridge Valves Catalog.

Weight: 1.5 kg(include valve)

* If you need the special specification. Please contact us.

X	SELECTION FOR COUNTERBALANCE VALVES	
11A3	CAVITY ONLY (WITHOUT VALVE)	
CB3H	CB11A33HL (3:1 , 280bar)	
CB4J	CB11A34JL (4.5:1 , 350bar)	
CB0J	CB11A30JL (10:1,350bar)	

The selection is only example. Please refer to Winner Cartridge Program and to select the appropriate valves and maniflods assembly in accordance with request function (flow pressure etc.)

Z	BODY MATERIAL	
Α	HIGH-STRENGTH ALUMINUM	

Rev.120118